



CONTINUOUS INSULATION ATTACHMENT TO MASONRY. REDUCES THERMAL BRIDGING.


Pre-drill hole with 5/16" masonry bit, then tap PMF with hammer until flush. The 2-3/8" diameter washer head permanently attaches insulation with a flush finish. The solid plastic design reduces thermal-bridging by eliminating inefficient screws / pins.

PRODUCT FEATURES

- Attaches all types of rigid insulation to concrete or masonry substrates.
- 2-3/8" diameter washer head
- Simple to install - Drill and hammer.
- No pins, screws, or adhesives required.
- Solid plastic design reduces thermal-bridging by eliminating inefficient screws / pins.
- Textured head design for basecoat adhesion when used with EIFS system.



PMF LENGTH	INSULATION THICKNESS
2"	1/2" - 3/4"
2-3/4"	1" - 1-1/2"
3-1/2"	1-1/2" - 2"
4-1/2"	2-1/2" - 3"
5-3/8"	3-1/2" - 4"
6-1/4"	4-1/2" - 5"

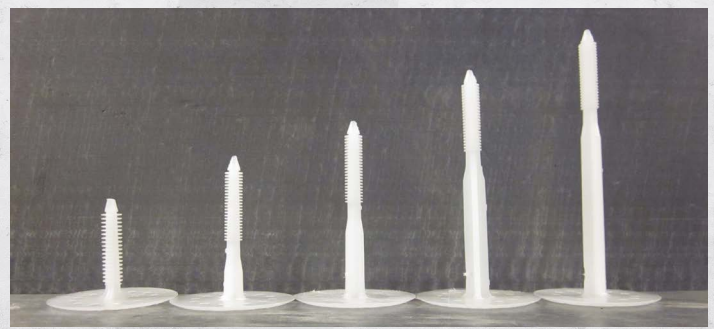

SINCE 1823

ALTENLOH, BRINCK & CO. US, INC.
ALTENLOH, BRINCK & CO. - GROUP

